



# Samsung SCH-A670 Screen Casing Replacement

Written By: Nathan Brink



## INTRODUCTION

The screen casing may become worn or broken over time. This guide will allow you to remove/replace it.

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery




- Slide the latch on the back of the phone up.


## Step 2



- Remove the battery.

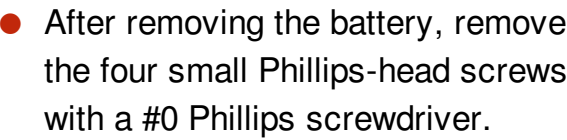

## Step 4

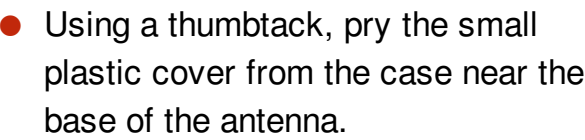




## Step 5




- With a #0 Phillips screwdriver remove the screw which you just uncovered.

## Step 6

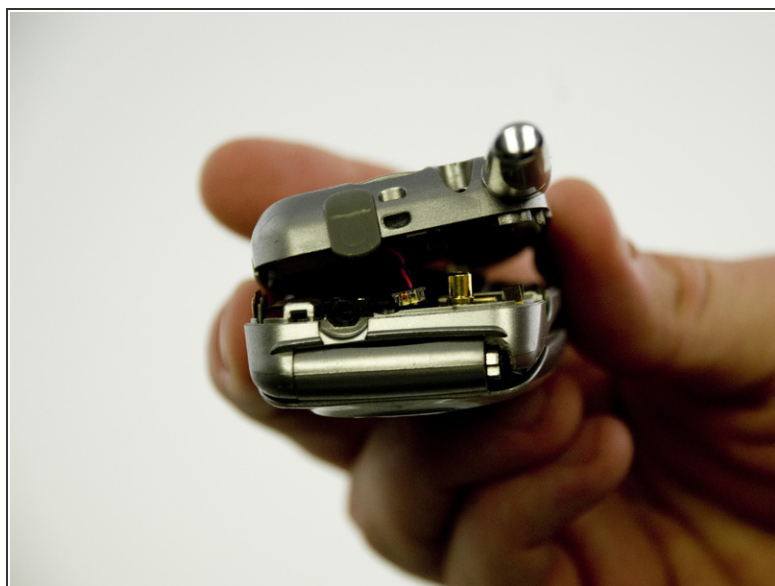


- Using the spudger, carefully pry the case apart starting near the charging port. Ease the case open.
- Then disconnect the small power connector near the top of the phone.

## Step 7

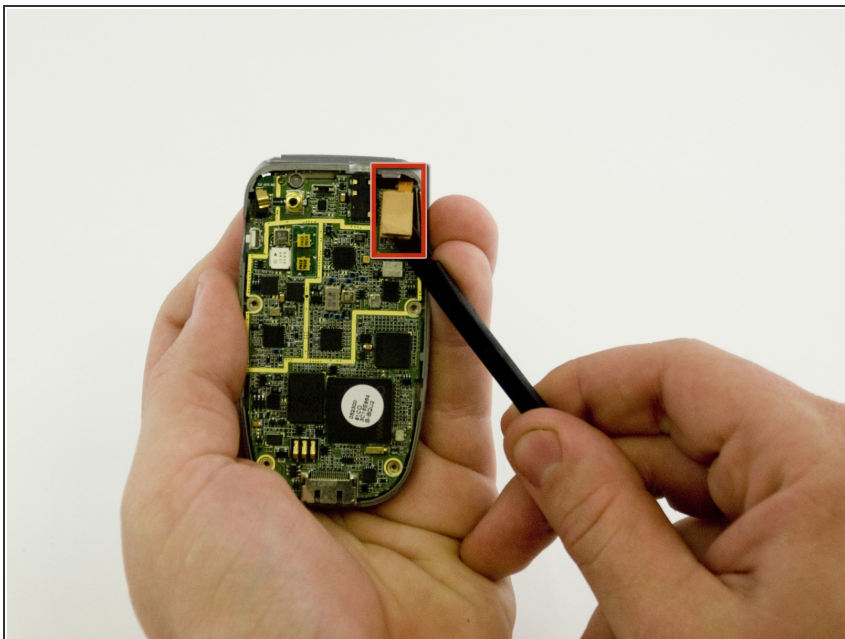


- Gently pry up the ribbon-type connector with the spudger.

## Step 8

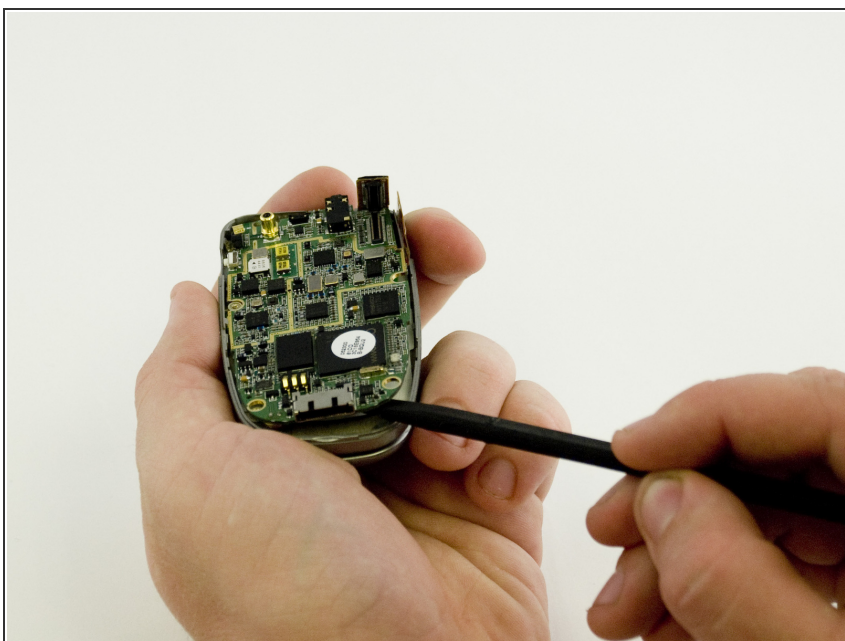

- Carefully pry the logic board from the case with the spudger.

## Step 9 — Keypad

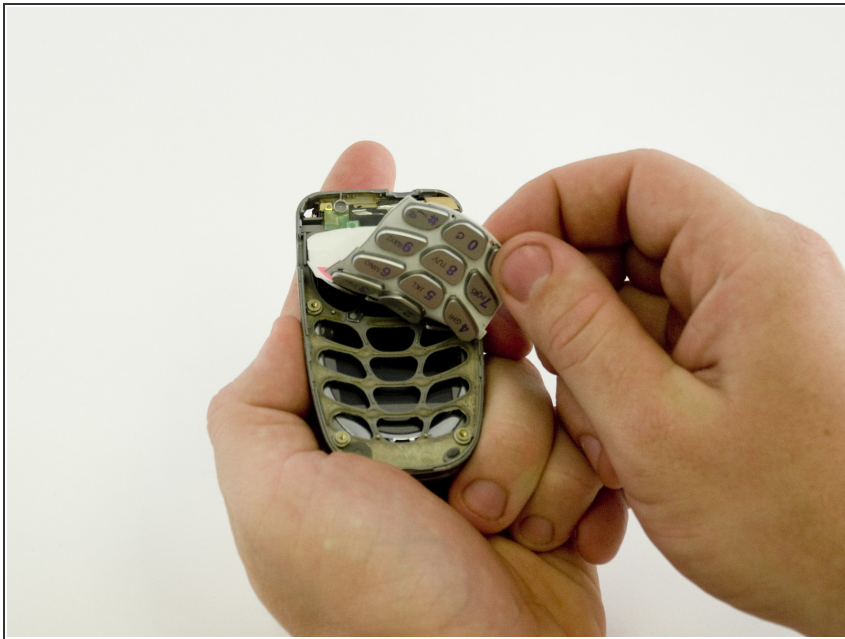

- Once the logic board has been removed, peel the keypad up.

## Step 10 — Keypad Housing



- When using a spudger the keypad housing comes off quite easily, although it may be necessary to guide the ribbon cable through the slot in the housing.



## Step 11 — Screen Casing



- Remove screws with #0 Phillips screwdriver.

## Step 12



- Carefully pry apart the casing with the spudger tool.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 02:36:45 AM.